


Pressure Rating:
235 psi 1/2" - 2"
150 psi 2-1/2" - 4"

Per ASTM F-1970
Non-shock water at 73°F


All socket and thread dimensions meet ASTM requirements:
 • PVC D-2467, D-2464 (ANSI B1.20.1)
 • CPVC F-439, F437 (ANSI B1.20.1)

Material Specifications:
 PVC conforms to ASTM D-1784,
 Cell Class 12454
 CPVC conforms to ASTM D-1784,
 Cell Class 23447

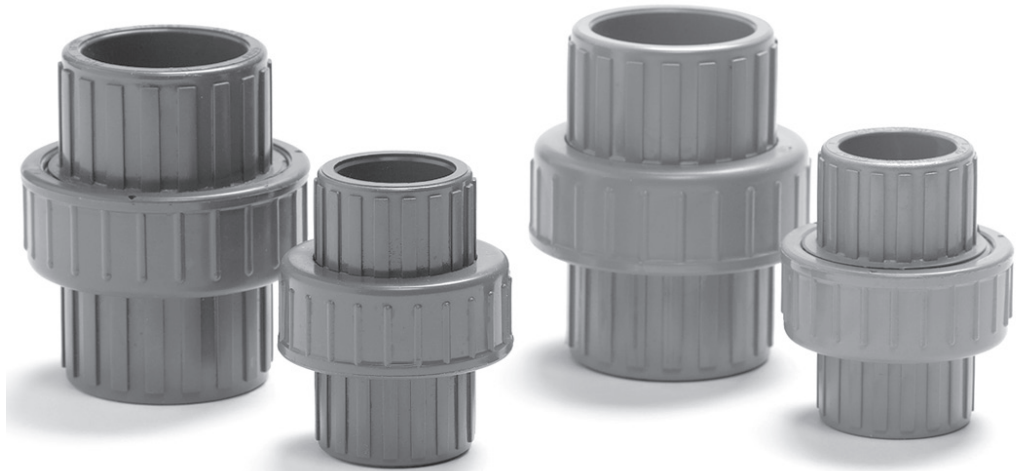

Dimension (in.)

SIZE	D	H
1/2"	1.99	2.27
3/4"	2.25	2.83
1"	2.65	3.24
1-1/4"	3.23	3.35
1-1/2"	3.37	4.02
2"	4.03	4.07
2-1/2"	5.47	4.49
3"	6.10	4.96
4"	8.86	6.30

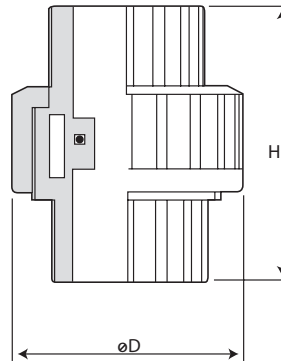

COMPRESSED AIR WARNING

The products in this document are only intended for use in transferring or storing chemically compatible pressurized liquids. Do not test or use products in this document with compressed air or other gases. Doing so is dangerous and could cause injury or great bodily harm should a system fail under compressed air. Only use products that are specifically designed for compressed air/gas service. Call Colonial technical service for more information.

AIR/GAS



SIZE	Ctn Qty	PVC W/ EPDM		PVC W/ FKM		CPVC W/ EPDM		CPVC W/ FKM	
		S x S	T x T	S x S	T x T	S x S	T x T	S x S	T x T
1/2"	200	897-005	898-005	857-005	858-005	1897-005	1898-005	1857-005	1858-005
3/4"	120	897-007	898-007	857-007	858-007	1897-007	1898-007	1857-007	1858-007
1"	72	897-010	898-010	857-010	858-010	1897-010	1898-010	1857-010	1858-010
1-1/4"	96	897-012	898-012	857-012	858-012	1897-012	1898-012	1857-012	1858-012
1-1/2"	36	897-015	898-015	857-015	858-015	1897-015	1898-015	1857-015	1858-015
2"	30	897-020	898-020	857-020	858-020	1897-020	1898-020	1857-020	1858-020
2-1/2"	24	897-025	898-025	857-025	858-025	1897-025	1898-025	1857-025	1858-025
3"	12	897-030	898-030	857-030	858-030	1897-030	1898-030	1857-030	1858-030
4"	4	897-040	898-040	857-040	858-040	1897-040	1898-040	1857-040	1858-040